



WHEN I HEARD WATER HEATING ACCOUNTED FOR 20% OF MY ENERGY BILL, I STARTED LOOKING FOR WAYS TO KEEP IT RUNNING AT MAXIMUM EFFICIENCY.

READ ON!

A water heater's like a trusty workhorse—steady, reliable and practically maintenance-free.

But giving your water heater a little extra TLC can significantly reduce your energy costs. Water heating can account for up to 20 percent of your home's energy use—second only to space heating.

How Water Heaters Work

When you turn on the hot water tap, heated water is drawn into your home's pipes from the top of your water heater. To replace the water being used, fresh cold water flows into the bottom of the tank, activating the heating element.

Gas and electric storage water heaters operate the same way. However, gas heaters have a pilot light at the bottom to ignite the burner. They also have a flue running through the center of the tank to exhaust combustion gases. And while gas models have only a single burner, electric heaters have a lower and an upper heating element.

Both models feature a temperature/pressure release valve near the top of the tank. This valve will allow steam or hot water to escape safely,

should a thermostat malfunction occur. It should be checked annually to ensure that it's working properly.

Energy-Saving Options


There are four main strategies you can take to save water and heating energy:

1. THERMOSTAT CONTROL

Your tank is probably keeping your water hotter than necessary. Most heaters are set at 140 degrees F, and this high a setting is only needed if you have a dishwasher without a booster heater. Turn the temperature down to 120 degrees F (midway between low and medium on a gas heater dial), and you'll cut your water-heating costs by six to 10 percent. It's wise to mark the current setting with a permanent marker. That way if you need to adjust the temperature a bit higher, you can easily see where you started.

Electric heaters have both an upper and a lower thermostat you'll need to adjust. However, before removing the thermostat access panels, be sure to first turn the electricity off at the circuit breaker or fuse box.

When you're going to be away from home for several days, consider turning your gas water heater thermostat to the pilot

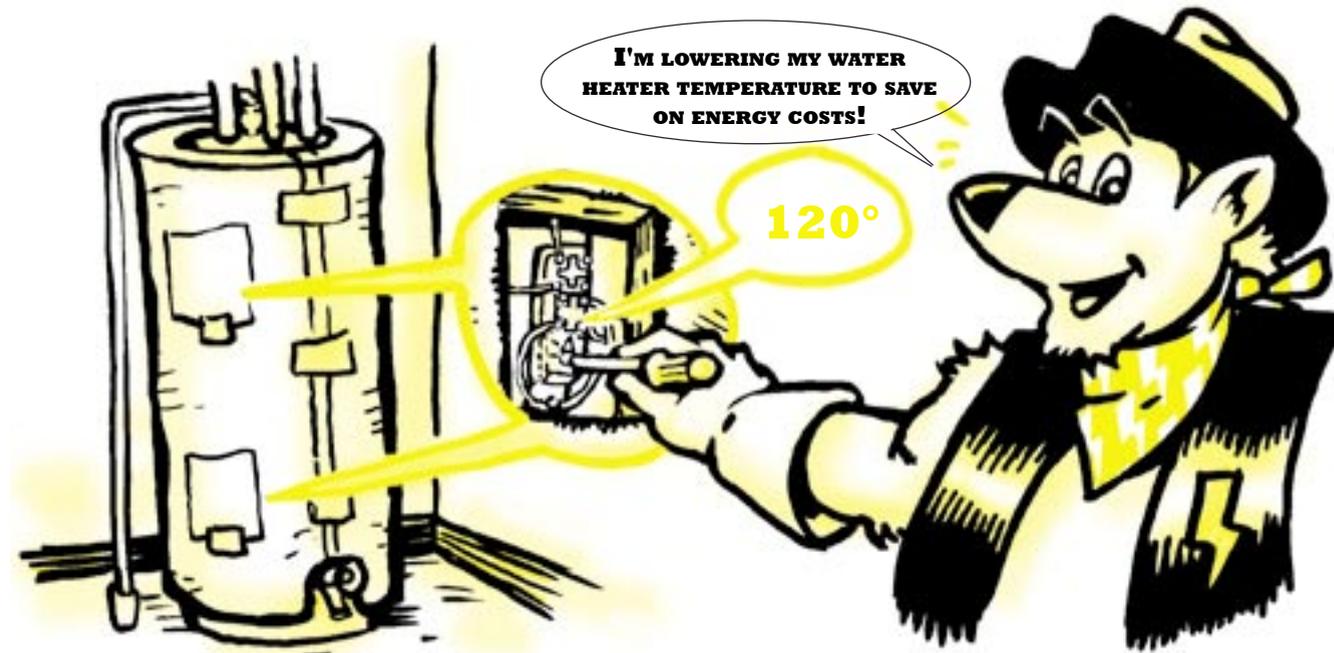

setting. Electric heaters can be shut off at the electrical breaker box. It'll take only about an hour to reheat once you return. If you have a gas model and shut the heater off, be sure to learn how to re-light the pilot light (see the back panel of this brochure).

2. INSULATING WRAP

Wrapping the tank in a blanket of fiberglass insulation will reduce stand-by heat loss by 25 to 45 percent. This means a savings of four to nine percent on your water-heating bill.

Water heater insulation kits are available for \$10 to \$20 at your local hardware store. They are easy to apply and will pay for themselves in less than a year. Be sure to carefully follow the directions. It's especially important to not cover exhaust vents and air intakes on gas models with insulation and to cut the insulation so you can access the thermostat panels on electric heaters. Never cover the pressure temperature relief valve. It's a good idea to put a strap near the top and near the bottom to further secure the insulation.


3. FLUSHING THE TANK

Over time, sediment and scale (dirt and mineral deposits from the water) build up inside your water tank. They reduce both heating element efficiency and the overall capacity of the water heater. You can reduce this build-up by regularly flushing water from the tank.

The drain valve is located near the bottom of the tank. Open the valve and let the murky water drain into a bucket until it runs clear (usually after one to two gallons). If the valve hasn't been opened in years, you may want to attach a garden hose to it the first time you drain, in case it's difficult to shut off. In some areas, depending on the hardness of the water, monthly flushing is recommended, and in others the tank need only be flushed once a year.

4. INSULATING YOUR HOT WATER PIPES

To save even more, consider insulating the first five feet of your hot and cold water pipes from the water heater. You can insulate your hot lines beyond five feet if they are accessible. Keep all pipe insulation at least three inches away from the hot exhaust pipe and draft hood on gas water heaters. Heat traps are one-way valves placed inside both the hot and cold water lines running into your water heater. They help to keep the hot water from rising out and the cold water from dropping in to your water heater when you're not drawing water from a tap. By following these four simple steps, you can ensure that your water heater will operate efficiently.

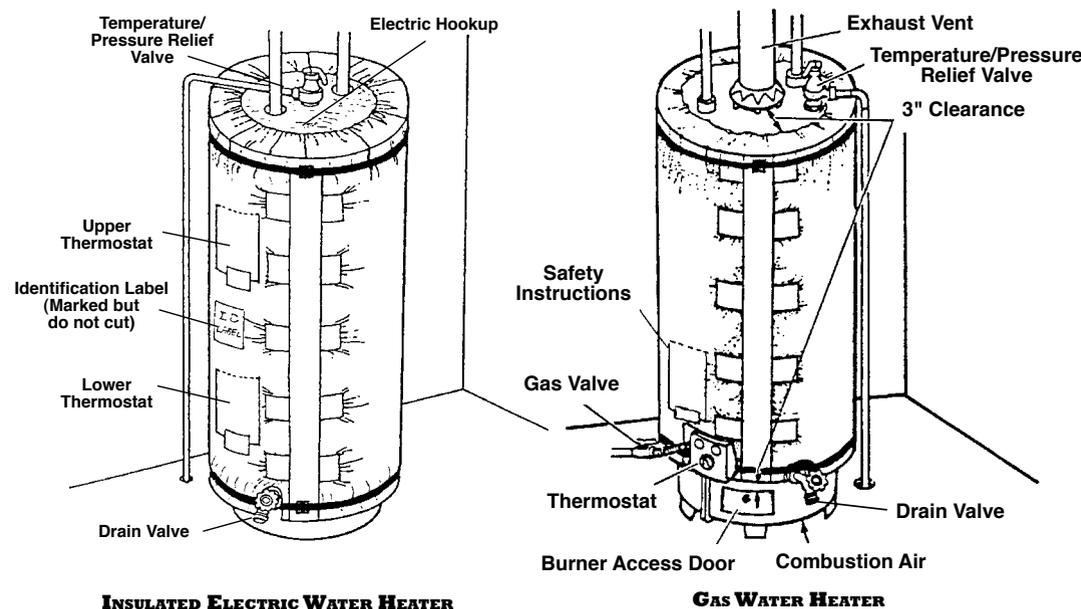

New Water Heaters

If you're in the market for a new water heater, you're in for a nice surprise: Today's models are considerably more energy-efficient, thanks to national appliance efficiency standards which took effect in 1990. Pay close attention to the yellow EnergyGuide labels when shopping. They provide information on energy efficiency and estimated annual operating costs for each model.

Before you buy, consider both purchase and operating costs. Models with the lowest price tags are often the most expensive to operate. And unless the owner's manual specifically states not to, wrap your new water heater in an insulating blanket and, if possible, put it in a heated space.

For More Information

Before purchasing a water heater, or if you have questions about maintaining your existing one, contact your local utility, the Human Resources Development Council, the tribal weatherization office, or the MSU Extension office in your county.

For the HRDC or tribal weatherization office nearest you, call 1-800-332-2272.



**MONTANA WEATHERIZATION
ASSISTANCE PROGRAM FOR
LOW-INCOME FAMILIES**



2,000 copies of this public document were published at an estimated cost of 30¢ per copy, for a total of \$600.


The U.S. Department of Agriculture (USDA), Montana State University and the Montana State University Extension Service prohibit discrimination in all of their programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital and family status. Issued in furtherance of cooperative extension work in agriculture and home economics, acts of May 8 and June 30, 1914, in cooperation with the U.S. Department of Agriculture, Douglas L. Steele, Vice Provost and Director, Extension Service, Montana State University, Bozeman, MT 59717.

♻️ Printed on Recycled Paper. November 2005 GM

Lighting a Water Heater Pilot Light

Instructions for lighting a pilot light should be on a plate mounted to the water heater. The instructions, which apply to most gas water heaters, are repeated here:

1. Turn the thermostat indicator knob to OFF.
 - a. This shuts off gas supply to the heater.
 - b. Wait 5 minutes for any gas that might be in the combustion chamber to clear the heater.
 - c. If closed, open the gas valve in the gas supply pipe.
 - d. Turn the indicator knob to PILOT.




2. Depress the indicator knob and light the pilot. (Continue holding the indicator knob for one minute after the pilot is lit. The pilot flame should remain on when the knob is released.)

3. Turn the indicator knob to ON. The main burner should ignite.


4. Set the water temperature dial to the desired temperature.

5. Repeat these instructions if it is necessary to relight the heater.



Gas Burner Assembly

If the pilot lights but goes off when you release the reset button, try holding the button down again for an additional 10 to 15 seconds. If it still fails to stay on, either the thermocouple is defective or it is not positioned properly in the flame of the pilot. The flame from the pilot should bathe the top 1/2 inch of the thermocouple rod. If it does not, loosen the bracket nuts and reposition the rod. In case you are wondering what the thermocouple does, it acts as a safety cutoff for the gas valve. When the pilot is lighted, the heat generates a slight electric current in the thermocouple, which then allows gas to come from the gas valve. When the pilot goes out, the thermocouple stops sending the current, and the gas supply stops. If the thermocouple is faulty, replace it.



Pilot Light Burner
Courtesy of Publications International, Ltd.

If you still cannot get the pilot lighted, there is probably something obstructing the flow of gas. Check the tiny orifice for clogs, and clean it if necessary, or call a plumber or heating contractor for maintenance.



WATER HEATER MAINTENANCE

Keeps Energy from
Going Down the Drain



IT'S TAKING
FOREVER FOR
THIS WATER TO
GET HOT!
I'M GONNA
TAKE A LOOK AT
MY WATER
HEATER!